

Solar Cascading Woodland Water Feature

With Back-Up On-Demand Lithium Battery

SWGSL275

Information For Use



To get the best use of this water feature, we highly advise that you read all the information and safety guidelines in this document.

Contents

- 1. Solar Cascading Woodland Water Feature
- 2. Underwater LED lights
- 3. Solar panel with built-in back-up lithium battery
- 4. Water pump

Positioning This Solar Water Feature


When placing this water feature, ensure the solar panel is placed where it can get the most direct sunlight.

Avoid positioning the solar panel in an area where there is a lot of shade as this will affect the performance.

Assembly Instructions

Please follow the instructions below:


- 1. Remove the product from its packaging.
- Place the water feature in a location where the solar panel can receive plenty of direct sunlight.
- 3. Screw the bird figurine into its position, and then place the top bucket on the top of the ornament while making sure the water tube goes through the opening at the top (see figure 1). The water tube should go all the way to the bottom.

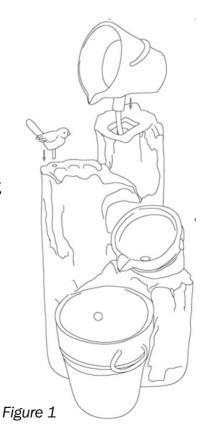

4. Open the door at the back of the water feature. Here you should see the wire for the LED light. Connect the pump to the water tube and place the pump at the bottom (see figure 2).

Figure 2

5. Connect the wiring for both LED light and water pump to the solar panel (see figure 3). Please note, the charge port for this product is not used. And this water feature is not supplied with a charger cable and it is also not available to purchase.



- 6. Secure the door back on to the ornament.
- 7. Position the solar panel so that it is getting direct sunlight.
- 8. Fill the bottom bucket with the water. The water level should be below the level of the door's opening at the back of the ornament. Ensure the water pump is fully immersed.

On First Use

The built-in back-up lithium battery in this product will have been 70-80% charged upon manufacture. However, on the date of purchase, the battery will lose its charge during shipping and storage. For best results, allow the solar panel to charge the battery for a full day in direct sunlight before using the pump.

Direction for Use

This water feature is designed to run during the day in direct sunlight. Any excess power produced via the solar panel will be used to charge the back-up battery. This will allow for running of the pump and LED light in the evening. Please note, the evening runtime will vary depending on charge level of battery and weather conditions.

The LED light automatically illuminates in the evening, if there is sufficient charge in the battery.

How to Turn On The Unit

To turn on the unit to start running the pump and the LED light, place your finger on the 'on/off' button on the rear of the solar panel for 1 second.

How to Charge The Lithium Battery

To switch off the pump, place your finger on the 'on/off' button on the rear of the panel for 3 seconds to turn off the pump. When the pump/LED light is switched off, all of the charge generated by the solar panel will be stored in the back-up battery.

Please note, this may have to be done periodically during inclement weather.

Battery status

On the reverse side of the solar panel, there is LED indicator light that will show you the battery charge status.

LED Colour	Status	Pump Run Time
Green	Battery is fully charged	6 to 8 hours
Orange	Battery is at 50% charged	2 to 6 hours
Red	Battery is less than 20% charged	Up to 1 hour

Cleaning and Maintenance

Pump

If the pump stops working or is running slow, you will need to disassemble and clean the pump to remove any debris/limescale from the filter and motor chamber, as shown below:

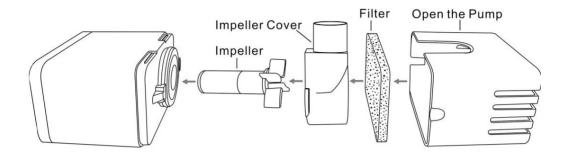


Figure 5

To disassemble the pump, ensure the unit is switched off. Remove the pump from the water tube and take the pump out of the water. Then, remove the pump cover, filter and impeller cover (figure 5). Clean them with fresh water and place them back inside the pump.

Solar Panel

The solar panel should be cleaned with a soft cloth on a regular basis to maintain an optimum efficiency.

Safety Warnings

Do not strike the solar panel.

Do not let the pump run dry for long time.

Do not lift the pump by the power cord.

Only use freshwater when using this water feature.

Storage

Ensure the battery is fully charged before storing and disconnecting all cables. We recommend the use of a cover to protect the water feature from dust/damage.

Troubleshooting

Troubleshoot

Pump not operating under full sunlight.

Potential Cause

Pump is not connected to the solar panel.

Impeller is blocked - to clean the pump, remove the front plate and the impeller. Use a small brush or fresh water to remove any debris.

Build-up of sediment or limescale inside the pump.

Pump Run Time

Check connection to the solar panel.

Remove blockage (see cleaning and maintenance.

Clean tubes and filter (see Cleaning and Maintenance)

Pump Performance In Different Weather Conditions

Weather

Pump is

operating

but water is not running through the



Pump On

Solar energy runs the pump and charges the battery. Pump performance is maintained when brief cloudy conditions occur. Pump runs up to 5 hours in the evening.

Pump Off

Battery should be fully charged in 1 day.



Solar energy runs the pump and supplies some energy to the battery. Performance is maintained when the clouds pass. Pump will only run a shorter period of time in

Battery will take 2 to 3 days to fully charge.



Pump will only run when there is sufficient power from the battery. Little or no battery charging occurs so pump performance is not maintained. Battery will take several days to fully charge.



No solar power is available, the pump will not run and battery will not charge.

Battery will not charge.

Technical Specification

Product	Solar Cascading Woodland Water Feature	
Supplier Code	SWGSL275	
Solar Panel	2W	
Operation Voltage	6V DC	
Water Flow Max	200LPH	
Water Lift Max	0.8M	
LED Light	3 LED light - white	
Cable Length	5M	
Lithium Battery	3.7V-2000 mAh	



Health & Safety

- Do not use the lights if the insulation or bulb have been damaged.
- · Never allow the product to come into contact with excessive heat or naked flame.
- This product is not a toy. Keep away from pets and children, ensuring that children are supervised at all times.
- · When disposing of this product, please do so in line with your local authority guidelines.

WEEE

The WEEE symbol on this product means that the Water Feature should be ethically dismantled or recycled to minimise environmental impact. Please check with your local authority for more information.







Streetwize,

Suite GA, Marsland House, Marsland Road, Sale M33 3AQ

For Product Support:

E: support@streetwize.co.uk **T:** +44 (0)161 447 8597

EU Regd. Address:

Ace Supply Co (Europe) Ltd. D02 A098, Republic of Ireland

www.streetwize.co.uk